


Specification Sheet

UNI540 Security Seal

The UNI540 is a small **2.7mm diameter** pull tight plastic security seal, with a tear-off facility for **removal by hand**. The UNI540 features an acetal plastic insert for increased security, and is produced in polypropylene as standard (**10KgF pull-strength**). Alternatively, this seal is available in a stronger **nylon material** for demanding applications (15KgF pull-strength).

The UNI540 is used across many industries, including **aviation, laboratory, cash-in-transit** and **ATM cassette** handling sectors. The UNI540 is available customised with bespoke information.

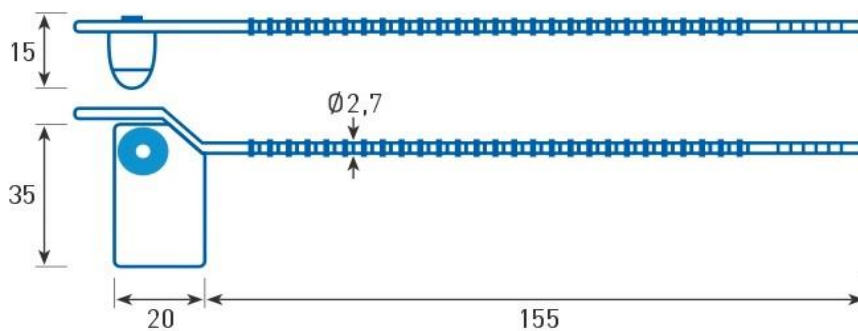

All dimensions in mm.

Applications

Airline industries, cash-in-transit, petrochemical, laboratories, enclosures, cases, valves

Size Guide

175mm overall length (useable 135mm)

Technical specs

Operating temp: -20°C to +80°C (PP)
-40°C to +80°C (PA)
Tensile strength: 10KgF (PP) / 15KgF (PA)

Packaging

	UV540	UV540-N
Quantity	1,000pcs	1,000pcs
Carton Dimensions	24x25x42cm	24x25x42cm
Box Weight	2.2kg	2.7kg
Pallet Info	100x120x225cm (100,000pcs)	100x120x225cm (100,000pcs)

Available Colours

Full range of colours available on request.

Material

Polypropylene or nylon option (UV540N), with integrated acetal plastic insert

Customisation Options

Organisation logo, bespoke text and markings, sequential numbering

Laser-printed as standard. Inkjet printing also available.